
Configure Grandstream GXP21XX/14XX/11XX IP phones with Calncall


Step 1: Connect the Grand stream phone to the network and power supply. The phone will boot up, and providing you have DHCP installed on your network, it will obtain an IP and display it at the bottom of the phone's LCD screen.

Step 2: Use your browser to access the web interface of the phone by entering <http://<ip-address>> where **<ip address>** is the IP address shown on the phone.

Step 3: Enter the password of the phone and click login to access the phone's configuration. The default password is '**admin**'.



Step 4 : Click on **Accounts** tab and select **Account 1**

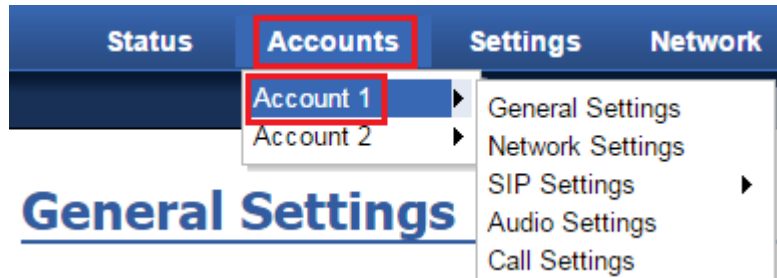

Step 5 : Enter the following Account information.

Account Active: Yes

Account Name & Name: Enter the name you want to appear on the phone's display

SIP Server: siptrunk.calncall.com

SIP User ID : <sip username>

Authenticate ID : <sip username>

Authenticate Password : <sip password>

General Settings

Account Active No Yes

Account Name	Reception
SIP Server	siptrunk.calncall.com
Secondary SIP Server	
Outbound Proxy	
SIP User ID	XXXXXXXX
Authenticate ID	XXXXXXXX
Authenticate Password
Name	Reception

Click **“Save and Apply”** to save these settings and the phone should register with Calncall.

You can verify this via the Status page on the phone.

Account Status

Account	SIP User ID	SIP Server	SIP Registration
Account 1	63401003	siptrunk.calncall.com	YES
Account 2			NO



Dial Pattern :

- ❖ For Singapore 65 + <Number>. Ex: 6563401006
- ❖ For International Prefix: 00 + <Country Code> + <Number>.
Ex: 008034790665(Japan)

You can buy from our website if you don't have an SIP account
www.calncall.com