

## Configuring a Yealink T2X/T4X IP Phones with Calncall SIP

**Step 1:** First you will need to factory reset the phone. Press & hold the “ok” button till the phone prompts the message “Reset to factory?” and press “ok” to reboot.

**Step 2:** To find your phone’s IP address, simply press the **OK** key on the phone.



**Step 3:** Point your browser to the web interface of your Yealink G series phone, which in this example is **http://192.168.7.155**

192.168.7.155/servlet?p=login&q=loginForm&jumpto=status

**Login** Enterprise IP phone SIP-T22P

Username

Password

Confirm Cancel

Enter your phone's login credentials – username and password is **admin** by default.

**Step 4:** Click on the **Account** tab and Enter the following information.

**Account:** Account1

**Line Active:** Enabled


**Label & Display Name:** Enter the name you want to appear on the phone's display

**Register Name :** <sip username>

**User Name :** <sip username>

**Password :** <sip password>

**SIP Server:** siptrunk.calncall.com

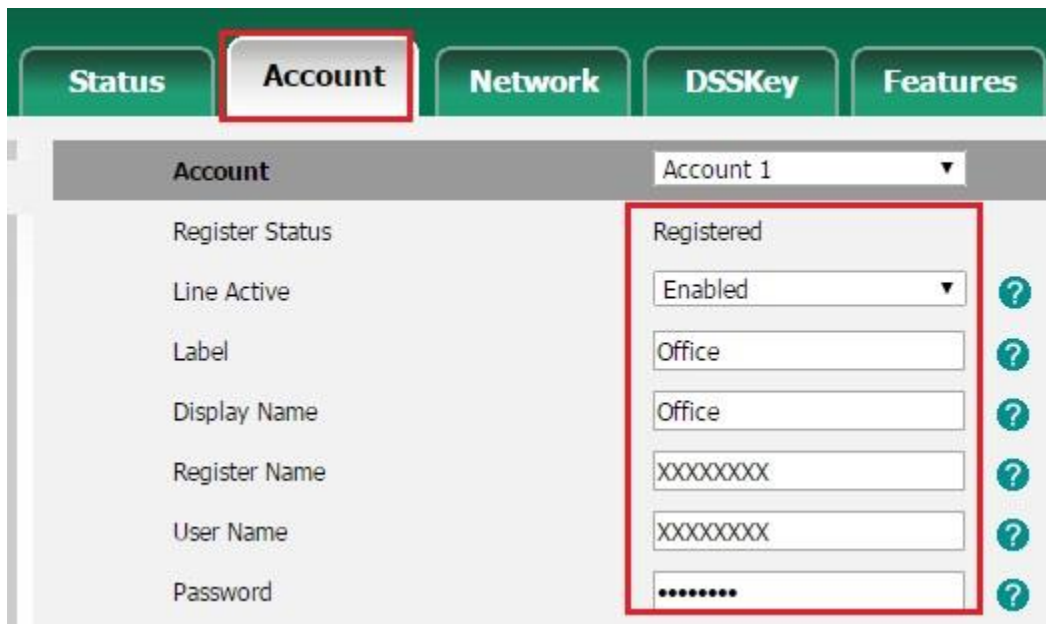

Account	Account 1
Register Status	Registered
Line Active	Enabled
Label	Office
Display Name	Office
Register Name	XXXXXXXX
User Name	XXXXXXXX
Password	.....

**SIP Server 1** ?

Server Host	<input type="text" value="siptrunk.calncall.com"/>	Port	<input type="text" value="5060"/>	?
Server Expires	<input type="text" value="3600"/>			?
Server Retry Counts	<input type="text" value="3"/>			?

**Step 5:** Once you've entered all the details in the accounts page click on **Confirm** and wait until your Yealink phone applies your newly configured settings.

### Dial Pattern :

- ❖ For Singapore 65 + <Number>. Ex: 6563401006
- ❖ For International Prefix: 00 + <Country Code> + <Number>. Ex: 008034790665(Japan)

You can buy from our website if you don't have an SIP account  
[www.calncall.com](http://www.calncall.com)