



Configure X-Lite IP Softphone with Calncall SIP:

You need a Calncall SIP line. To configure SIP Account if you don't have please visit our site www.calncall.com and buy it.

Follow Below steps to set up your X-Lite phone:

1. Go to <http://www.counterpath.com/x-lite-download> and download X-Lite.
2. Open X-Lite and go to > Softphone > Account Settings.

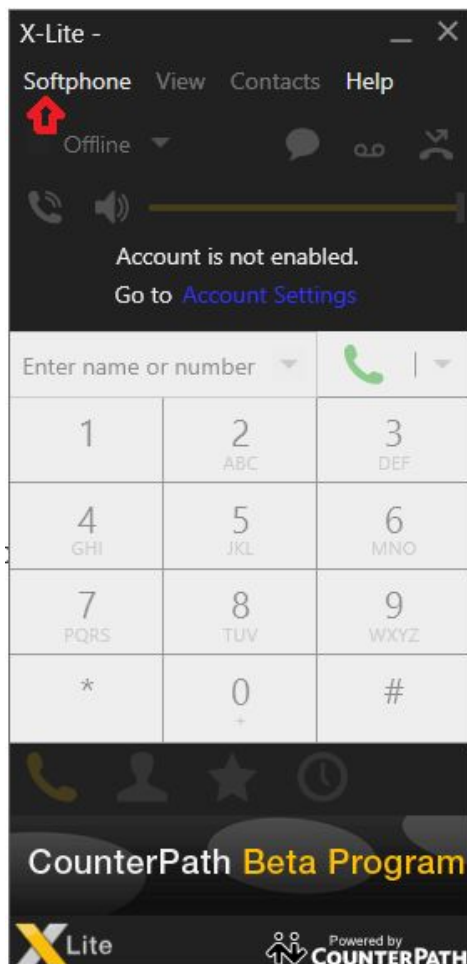

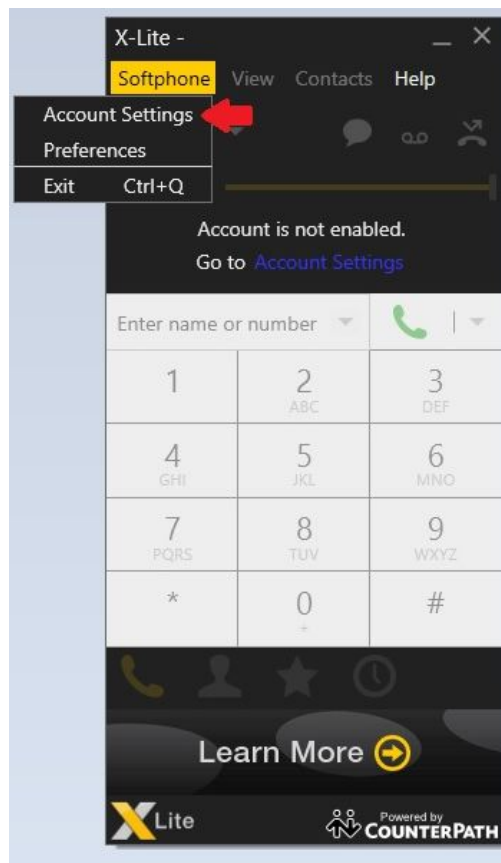

3. On the "Account" window, enter the following information. Then click on "OK".

- Account name: SIP Username which is provide by calncall (e.g. XXXXXXXX)
- User ID SIP Username which is provide by Calncall(same as account name)
- Domain: siptrunk.calncall.com
- Password: SIP Password which is provide by Calncall
- Display name: anything you want to appear on top

SIP Account

Account Voicemail Topology Presence Transport Advanced

Account name: 63401003

Protocol: SIP

Allow this account for

- Call
- IM / Presence

User Details

* User ID: 63401003

* Domain: siptrunk.calncall.com

Password:

Display name: Calncall

Authorization name:

Domain Proxy

- Register with domain and receive calls

Send outbound via:

- Domain
- Proxy Address:

Dial plan: #1\|a.T;match=1;prestrip=2;

OK Cancel



Once it is get register you can see on top.. "Available"

4. **To make outgoing calls, follow this standard:

For Overseas:

00+ <country code> + <area code> + <destination>. For example, if you are calling a China number XXXXXXXX, China code is 86 so key in: 0086XXXXXXXXX and call.

For Singapore:

<country code> + <area code> + <destination>. For example, if you are calling a Singapore number XXXXXXXX, key in: 65XXXXXXXX

You can buy from our website if you don't have an SIP account www.calncall.com